



# TELECRAWLER**13N**


Tracked Telescopic Aerial Platform



# New Electric Telescopic aerial platform



**TeleCrawler13N** is the new lithium powered telescopic crawler aerial platform, with a load capacity of 136 Kg, which can reach a working height of 13 m and features a horizontal outreach of 6.4 m. The signature feature of this model is its compact size: it is very small and has a stabilisation area of just 2,450 mm x 2,900 mm which means the platform can be stabilised inside a single car parking space !

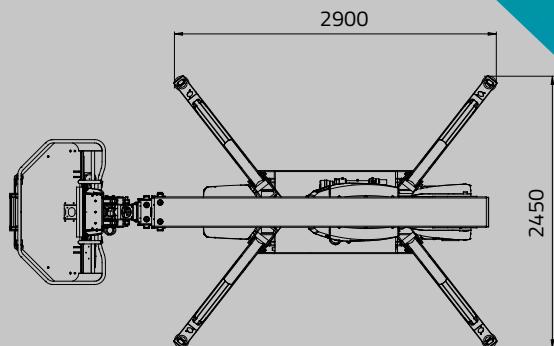

# TeleCrawler13N, eco-friendly platform!

## Features:

**It is uniquely compact:** without basket it measures just 3,698 mm length, 1,948 mm height and 748 mm width.

**Automatic telescopic boom extension control when going up/down:** the same distance from the wall can be automatically maintained to follow a vertical line up to 9 m, both when going up and down.

The undercarriage is equipped with **electric traction motors** allowing to travel on electric power only, without use of hydraulic oil.

The first telescopic aerial platform with "**full electric**" crawler tracks. An eco-friendly solution which significantly improves the efficiency of operations and daily work.

The "memory" package (optional) includes: **"Go Home"** function allows to automatically and safely close and align the telescopic boom, and **"Go Back"** function: the machine stores the last working position so that it can automatically return to it simply pressing a button.

TC13N can also work on challenging terrains with presence of mud or dust. **The absence of oil in the undercarriage eliminates the risk of leakages on the ground;** enhancing the respect of the environment.



Battery charger and display indicating the charge status of the TeleCrawler13N



Stabilization plates holder with locker



LED front and rear working lights




Electric motor




STANDARD PAD (300 mm)  
WITH EASY MOUNTING  
QUICK CONNECTOR

# TELECRAWLER 13N

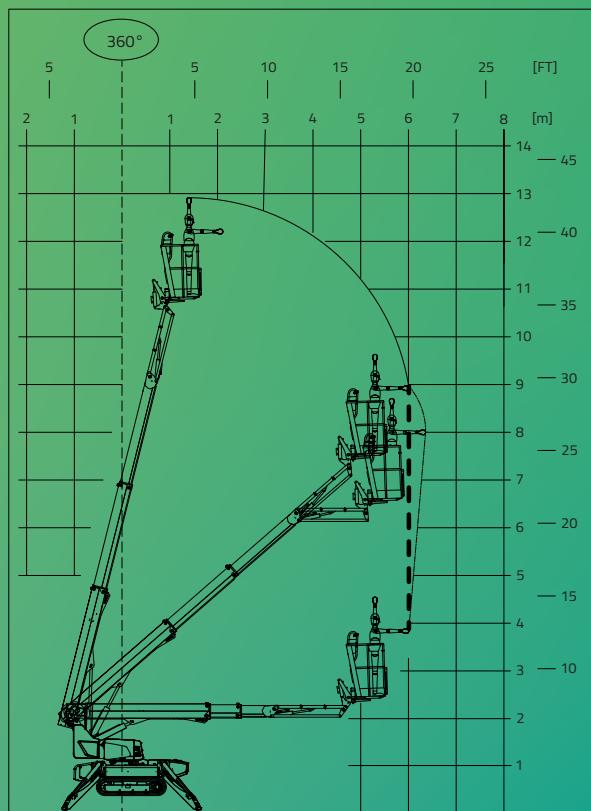

HINOWA is continuously researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards could increase the weight. Specifications may change with the addition of optional equipment or to meet country standards.

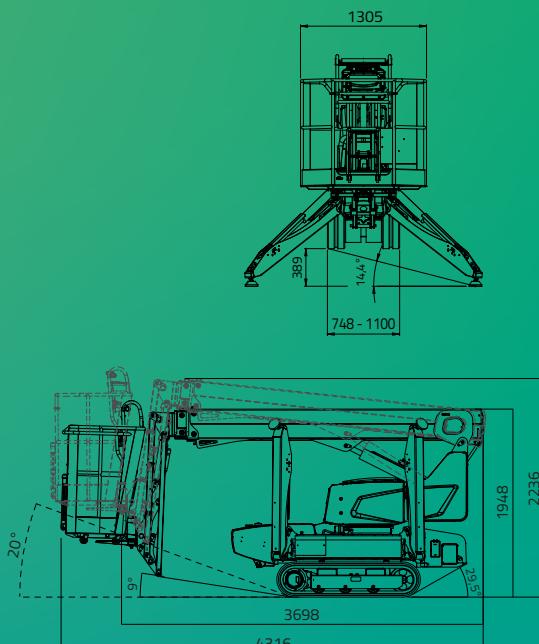

**Capacity 136 Kg**  
(1 person 80 kg + tool box 56 kg)

	12,90 m
	6,40 m
	4,316 m
	3,698 m
	1,948 m
	748 - 1100 mm

	1305x600xh.1100 mm
	16°
	1895 kg / 4178 lb
	2900 x 2450 mm
	Automatic set up system IIIS std
	Remote control



GPRS-GPS  
R.A.H.M.

## LITHIUM-ION

Battery ..... 52V 80Ah  
 Electric motor :  
 - rated voltage ..... 48 V  
 - rated power ..... 2 kW  
 Onboard battery charger :  
 110V-220V+-30V 50-60 Hz