



**SOLID**  
TO SUCCEED

ROUGH TERRAIN SCISSOR LIFTS

# XG1523RT/XG1823RT



The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.

# XG1523RT/XG1823RT



## Rough terrain scissor lifts

### FEATURES

#### PRODUCTIVITY


- Up to 680kg lift capacity
- 4 driving wheels
- 2 steering wheels
- 40% theoretical gradeability
- Outrigger leveling system
- Both platform and ground control panel with emergency stop button
- 4-wheel multi-disc brakes
- Solid rough terrain tires
- Hourmeter record
- Tilt alarm
- Lift and lower alarm
- Horn
- Dual flashing beacons
- Drive alarm
- Axle balance system
- Overload alarm

#### POWER

- 12V DC emergency power
- Kubota Euro stage V emission
- 115L hydraulic oil tank
- 115L diesel fuel tank

### OPTIONS

- Platform working light
- AC power to the platform

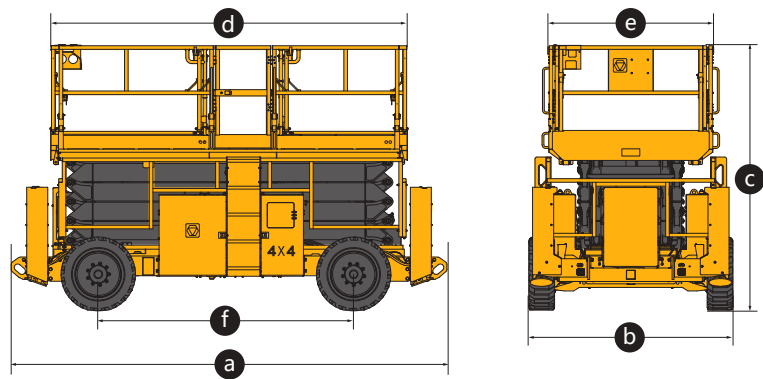

Item	Unit	XG1523RT	XG1823RT
Lift capacity	kg	680	680
Lift capacity of auxiliary platform	kg	230	230
Occupant capacity	-	7	4
Working height	m	15	18.1
Platform height	m	13	16.1
Length of auxiliary platform	mm	1450/1140	1450/1140
Ground clearance	mm	253	253
Turning radius (inside/outside)	m	2.5/5.6	2.5/5.6
Drive speed (retracted/extended)	km/h	6.1/1.1	6.1/1.1
Lift/Lower time	s	45/45	55/55
Gradeability	%	40	40
Tilt alarm (side/forward and backward)	°	2/3	2/3
Power source	-	Kubota V2403	Kubota V2403
Rated power	kW/(r/min)	36.8/2700	36.8/2700
Tires	-	33×12-20	33×12-20
Fuel tank	L	115	115
Hydraulic tank	L	115	115
Weight	kg	7250	8000
a Length	mm	4860	4860
b Width	mm	2286	2286
c Height (platform folded)	mm	2950(2290)	3170(2510)
d x e Platform size (Length x Width)	mm	3980×1830	3980×1830
f Wheelbase	mm	2850	2850

SOLID TO SUCCEED