
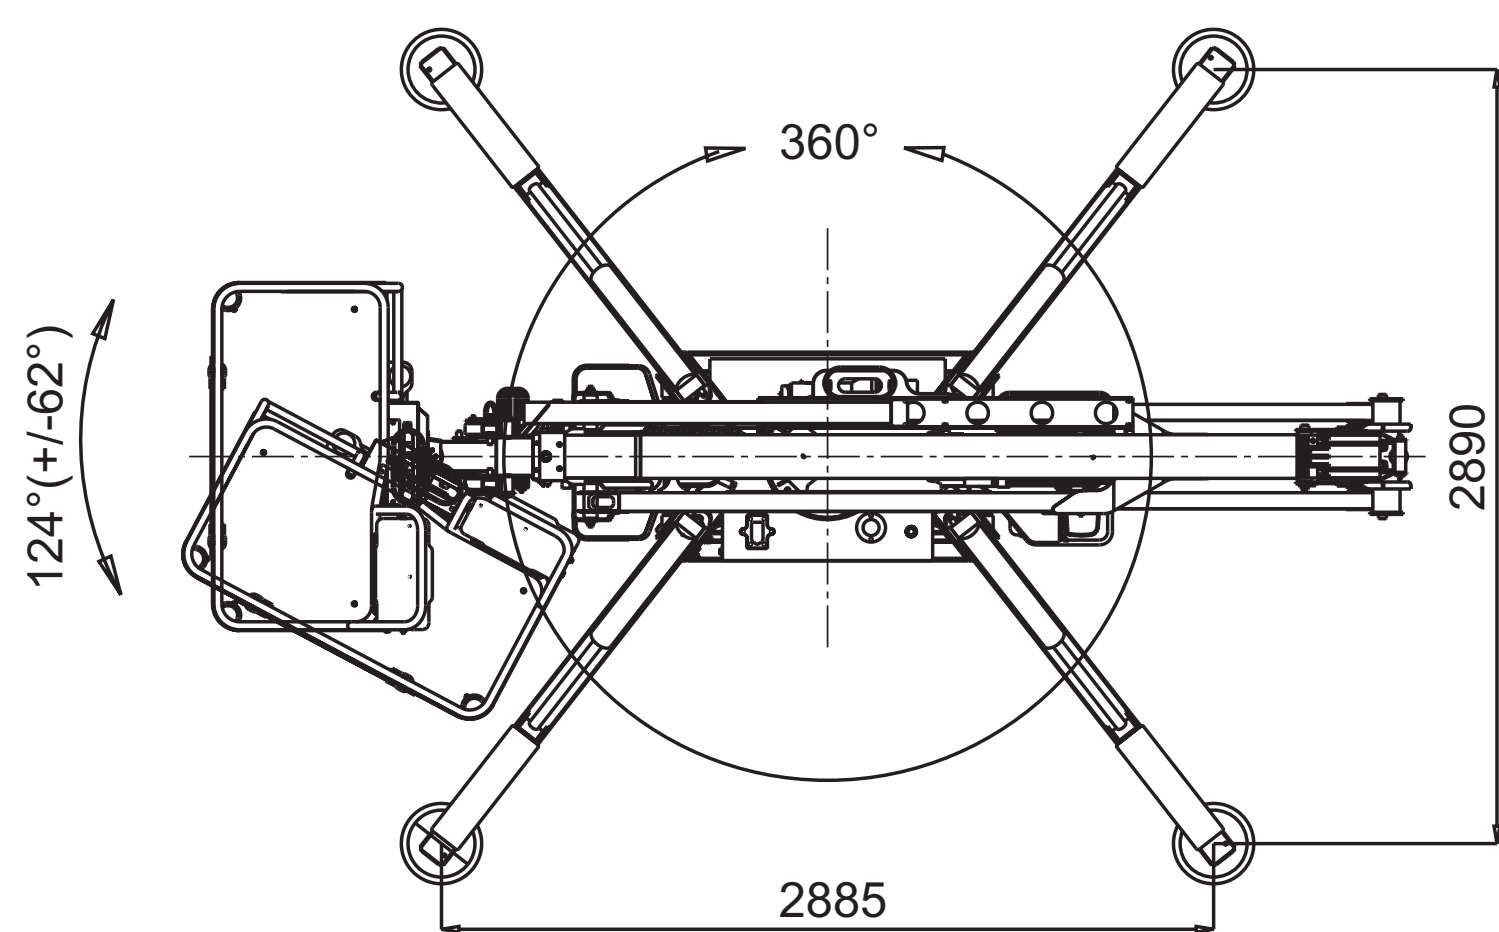
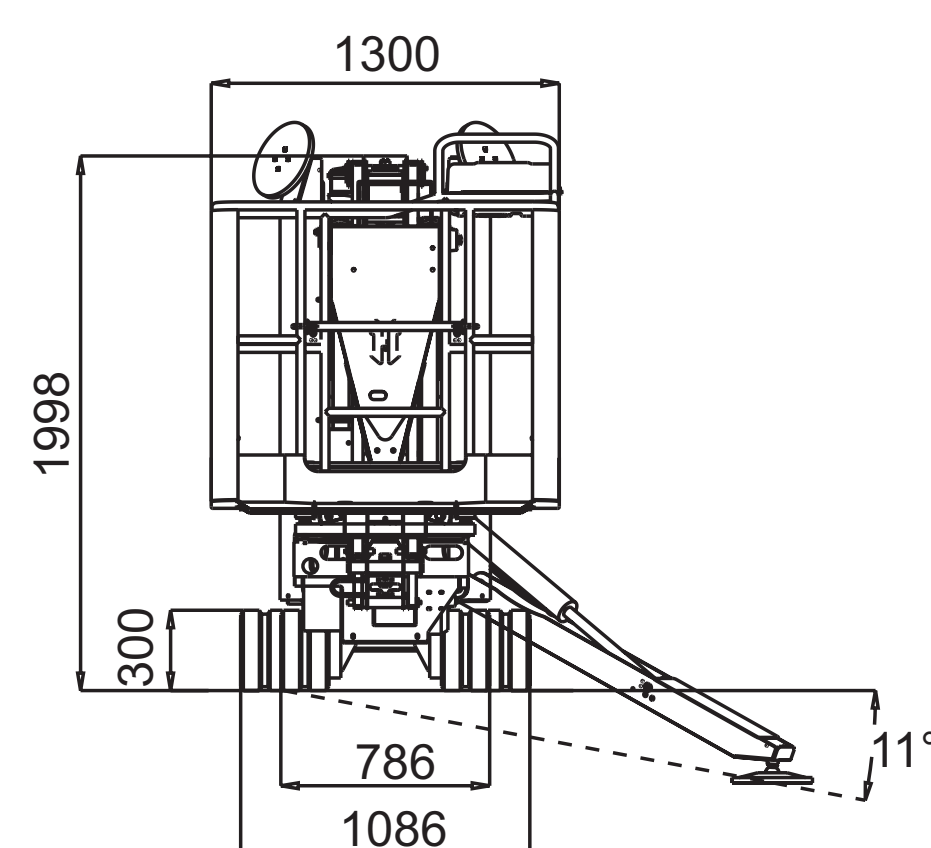
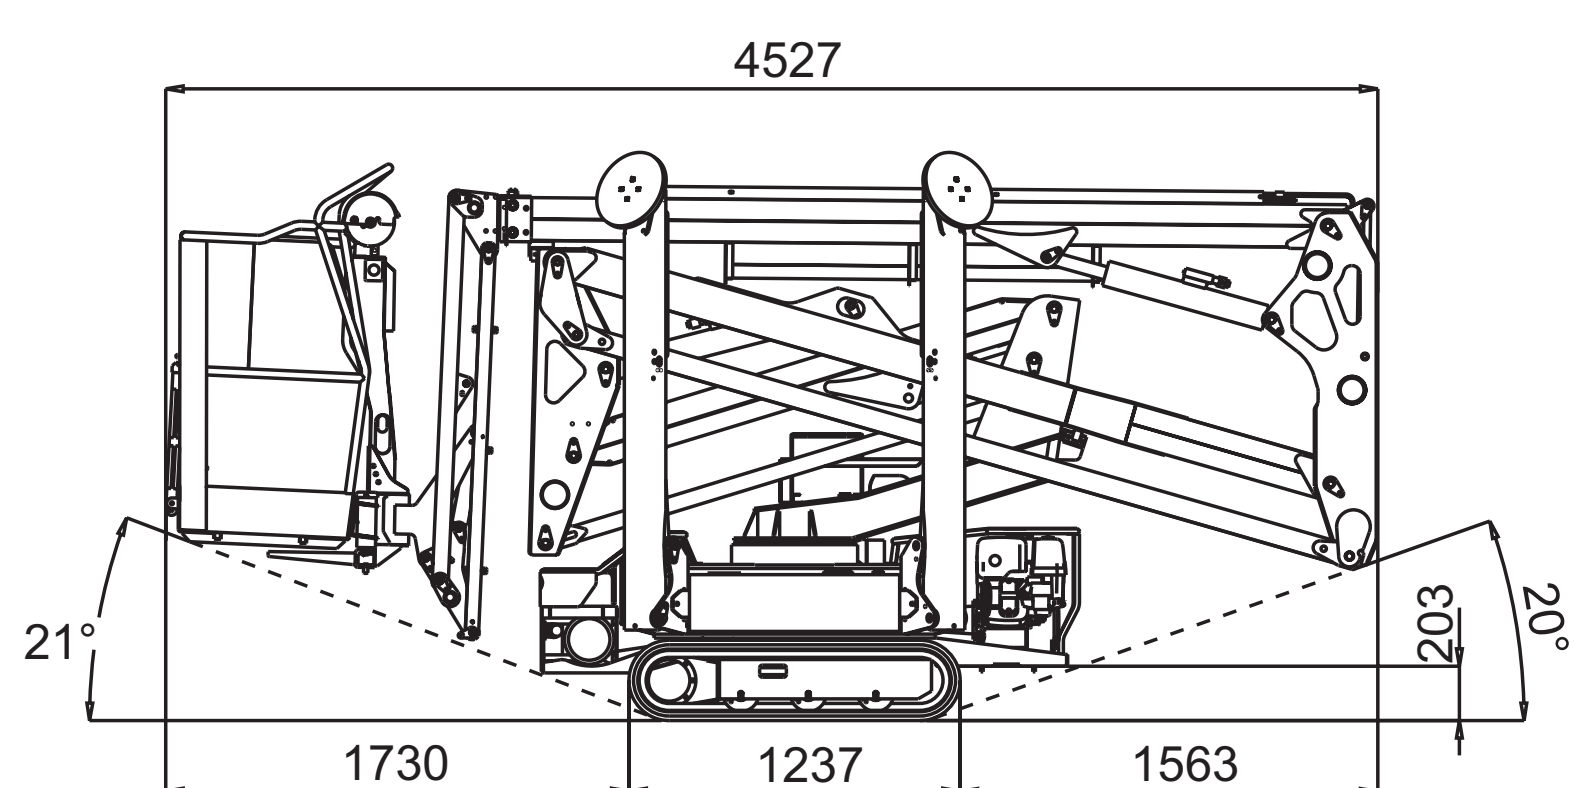


15,22 m

16,91 m

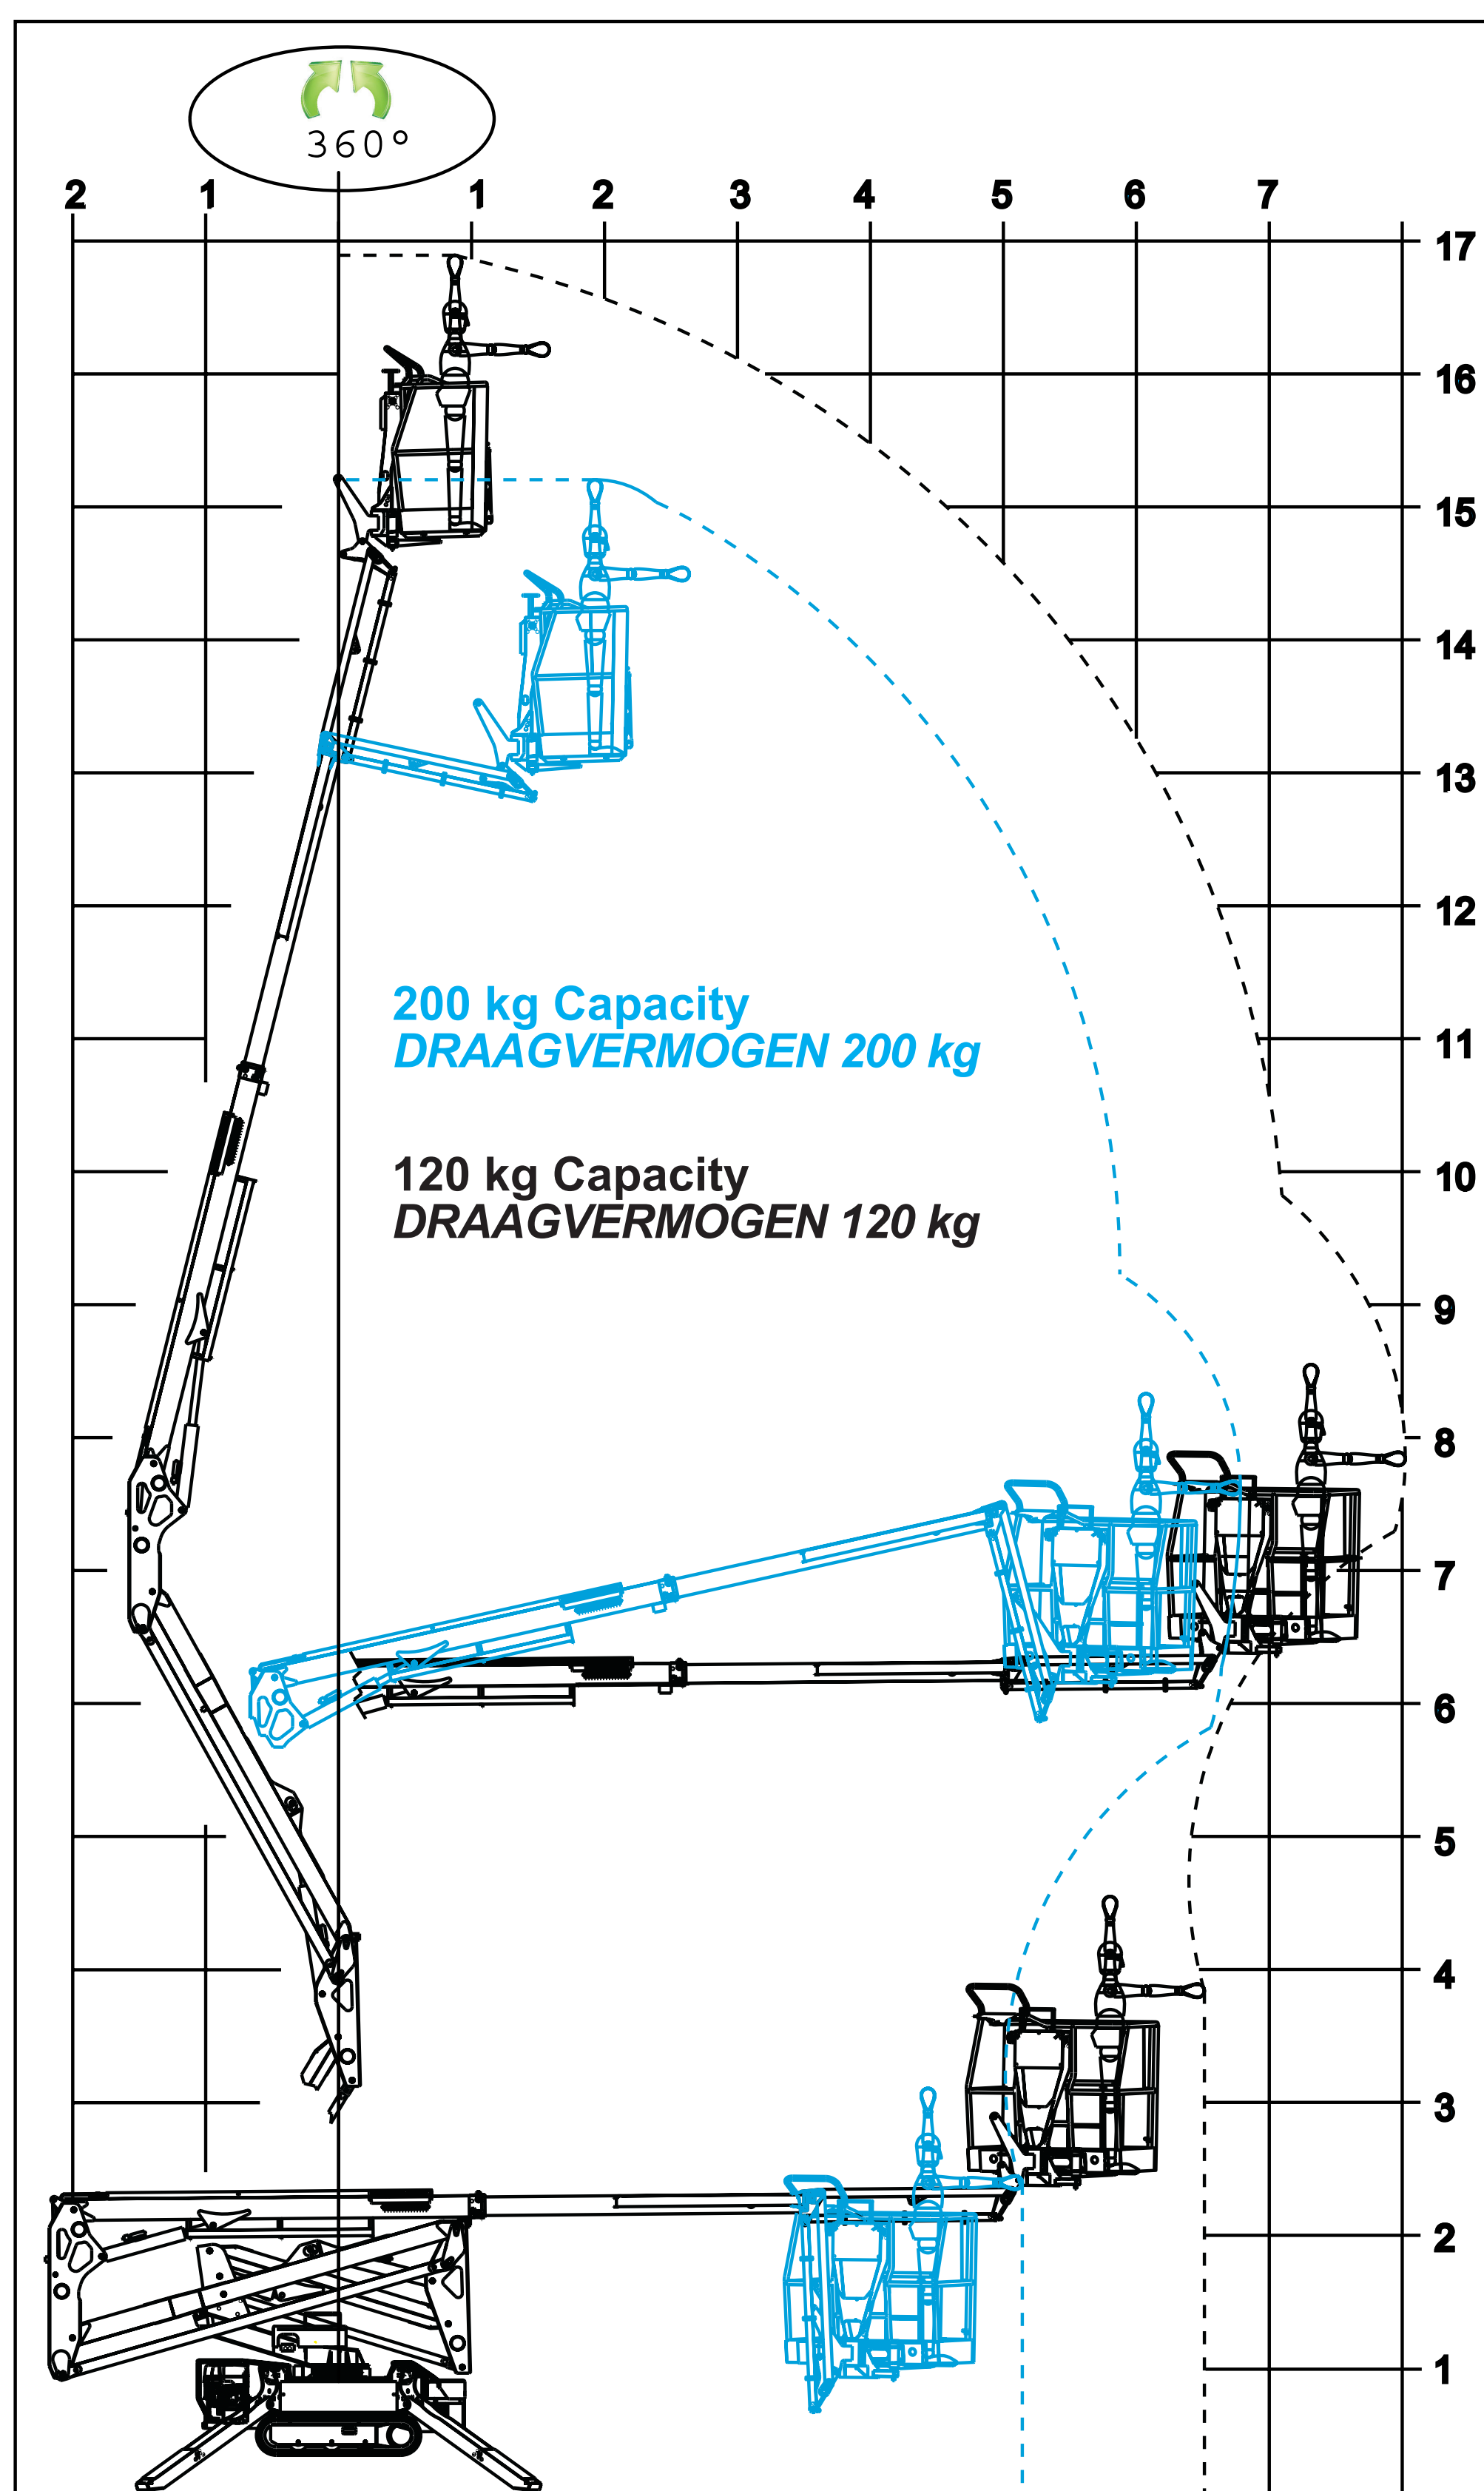


6,78 m


8,02 m




4,52 m



1,98 m



1330x652xh.1115 mm



124° (+/-62°)




21°/38,4%



2080 kg / 4585,61 lb




Honda iGX440-15CV-3600rpm
HATZ 1B40-10CV-3600rpm



2,2kw-230V-50Hz-1500rpm
2,2kw-110V-50Hz-1500rpm




Honda: • I 1,3 km/h
• II 1,7/3,3 km/h (optional-*Optioneel*)
Hatz: • I 1,0 km/h
• II 1,3/2,6 km/h (optional-*Optioneel*)



786/1086 mm



2100 daN - 0,62 daN/cm²



1450 daN - 2,0 daN/cm²



AUTOMATIC STABILIZING
SYSTEM III S STD.
*AUTOMATISCHE STABILISATIE EN
DESTABILISATIE "IIIS" IN
SERIEPRODUCTIE*






RADIO REMOTE CONTROL STD.
*RADIOBESTURING IN
SERIEPRODUCTIE*



GPRS-GPS MODEM STD.
*GPRS-GPS MODEM IN
SERIEPRODUCTIE*



R.A.H.M. REMOTE ASSISTANCE ON
HINOWA MACHINES
*R.A.H.M.-REMOTE ASSISTENTIESY-
STEEM IN SERIEPRODUCTIE*



OPTIONAL/*OPTIONEEL* 90Ah / 48V