



The high performance van

WORKING DIAGRAM




STANDARD ACCESSORIES

DATA SHEET

- Fiberglass basket: 1400x700x1100 mm
- 400° turret rotation
- Pipes and cables installed inside the boom
- Articulated jib
- 2 "A" outriggers
- Proportional electro-hydraulic controls with speed regulation of all movements
- Stabilization controls from the basket and from the ground
- Possibility of simultaneous movements
- Engine start/stop from the basket
- 230v and 12v socket in the basket
- Digital hour-counter
- CAN BUS electronic management system
- Cataphoresis

SAFETY DATA

- Unintentional maneuvering control E.C.S (Easy Control Security)
- Protection bar for involuntary maneuvers
- Magnetothermic with 230V line differential protection
- Automatic levelling of the basket
- Inclinometer
- Flanged block valves
- Emergency stop button
- Emergency manual pump
- 12V emergency electric pump
- Possibility of remote emergency operations
- Automatic PTO disengagement
- Cabin warning light of closed stabilizers
- Maintenance light (Service)

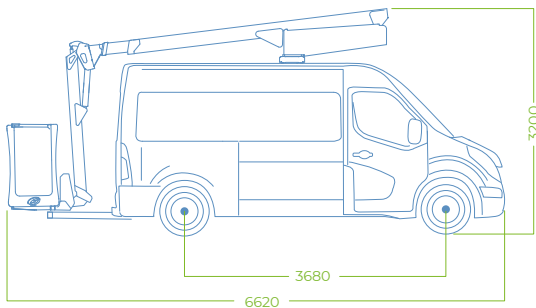

*Dimensions can change according to the assembly